

# POWERMADD® Pro-Ride Windshields

## Installation Instructions for Part No. 11821, 11830 & 11840

### HARDWARE INCLUDED:

Qty	Description
1	Windshield
8	Well Nuts
8	Snap Cap Washers
8	Black Snap Caps
8	Screws

### TOOLS REQUIRED:

Description
Drill
3/8 Drill Bit
Phillips Screwdriver
Standard Screwdriver
Needle Nose Pliers

**STEP 1:** Start by removing the stock windshield. Use a needle nose pliers or standard screwdriver to remove the push pins holding the windshield on.

**STEP 2:** Once the windshield is removed insert six of the well nuts into the holes in the pod. **Note:** You might need to enlarge the holes with the 3/8 drill bit if the well nuts do not fit. *Photo 1*

**STEP 3:** Set the new windshield in place and install the six screws. You do not need to install the bezel/trim at this time. *Photo 2*



Photo 1

**Skip Steps 4-7 if you purchased the 11821**

Continued on next page...

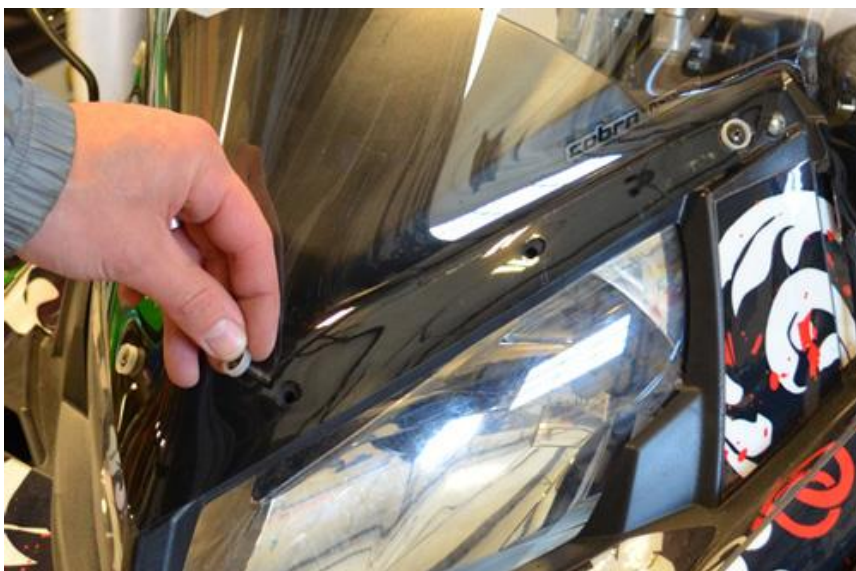


Photo 2

**STEP 4:** Once the windshield is secure, mark the location of the two rear mounting holes with the tip of your screwdriver. *Photo 3*

**STEP 5:** Remove the six screws and then the windshield.

**STEP 6:** Use the 3/8 drill bit to drill the holes in the location marked in step 4. **Note:** Use caution when drilling as to not drill too deep. *Photo 4*



Photo 3

**STEP 7:** Insert the last two well nuts into the holes you just drilled.

**STEP 8:** Set the windshield bezel into place.

**STEP 9:** Insert all screws with snap cap washers through the windshield and bezel into the well nuts. Once inserted, tighten the screws. Apply pressure to the windshield so the well nuts do not spin while tightening screws.

**STEP 10:** Install the black snap caps.



Photo 4

### LIMITED WARRANTY

**POWERMADD** warrants this product to be free from defects in material and workmanship under use for the purpose it was intended. **POWERMADD** shall not be liable for damage or injury caused by defective materials or workmanship. **POWERMADD** may elect to repair or replace this product, but is the sole judge of any defects in their product. This warranty does not cover any labor costs to remove or reinstall this product and is effect for one year from the original purchase date.